

## VALVES FEEDING AUTOMATIC INDEXING MODULE TYPE: Z-1056



Valves Feeding Automatic Indexing Module Z-1056 is part of an automatic bottle closing (capping) line and performs the following process steps:

- Picking up the cans from the conveyor belt;
- Embedding the valve on the container;
- Checking the presence of the valve;
- Depositing the finished product onto the conveyor belt.

The capacity of the machine is about 40 pcs/min. The machine is pneumatically and electrically powered and is assumed to be supported by an automatic feeder (sorter) of BOV valves.

















## **Working parameters**

Capacity: up to 2400 szt/h (40 szt/min)

Cans diameter:  $\emptyset 35 \text{ mm} \div \emptyset 66 \text{ mm}$ Cans height:  $65 \text{ mm} \div 300 \text{ mm}$ 

## Dimensions and weight

Width: 1250 mmLenght: 1180 mmHeight: 1845 mmWeight:  $\sim 522 \text{ kg}$ 

## **Supply**

Supply type: Pneumatic and electric

Required supply pressure:  $0.8 \div 1.0 \text{ MPa} (8 \div 10 \text{ bar})$ 

Compressed air quality: Class IV according to ISO 8573-1


standard for temp. 15 ÷ 35°C


Air consumption: 37 m<sup>3</sup>/h

Connection: External thread G3/4" BSPP

Supply voltage: 3x230 V, 50Hz

Power: 0,18 kW

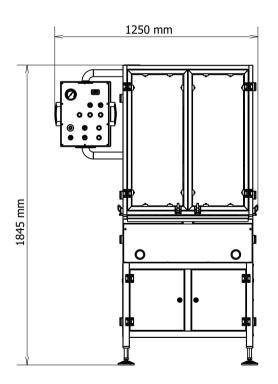

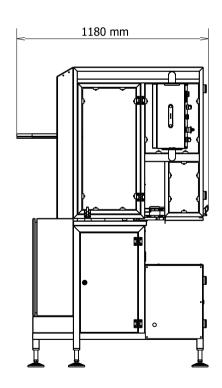















43-600 Jaworzno POLAND

PLN 56 1050 1360 1000 0090 3033 8132 EUR 94 1050 1360 1000 0024 0995 9893 SWIFT: INGBPLPW